


## Threaded Flange

Type 13B PN 10 / 16 / 25 / 40\*  
EN 1092-1 ADW0, ADW2, ADW9, ADW10  
EN 10204 3.1

\*) replaced DIN 2566



DN mm	A mm	D mm	T mm	K mm	N2 mm	H1 mm	Thread	D1 mm	F mm	No.	Bolts Thread	L mm	Kg / pc	EN 1.4307 304/L	EN 1.4404 316L
15	21.3	95	16	65	35	22	R 1/2"	45	2	4	M12	14	0.67	GT11082550	GT11252550
20	26.9	105	18	75	45	26	R 3/4"	58	2	4	M12	14	0.94	GT11083025	GT11253025
25	33.7	115	18	85	52	28	R 1"	68	2	4	M12	14	1.11	GT11083560	GT11253560
32	42.4	140	18	100	60	30	R 1 1/4"	78	2	4	M16	18	1.82	GT11084135	GT11254135
40	48.3	150	18	110	70	32	R 1 1/2"	88	3	4	M16	18	2.08	GT11084470	GT11254470

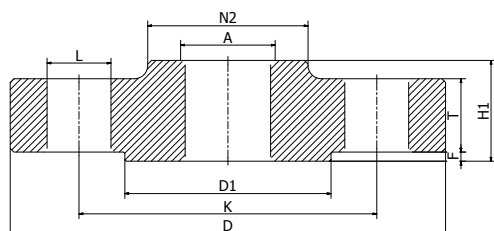

## Threaded Flange

Type 13B PN 10 / 16\*  
EN 1092-1 ADW0, ADW2, ADW9, ADW10  
EN 10204 3.1

\*) replaced DIN 2566



DN mm	A mm	D mm	T mm	K mm	N2 mm	H1 mm	Thread	D1 mm	F mm	No.	Bolts Thread	L mm	Kg / pc	EN 1.4307 304/L	EN 1.4404 316L
50	60.3	165	18	125	84	28	R 2"	102	3	4	M16	18	2.73	GT12085115	GT12255115
65	76.1	185	18	145	104	32	R 2 1/2"	122	3	8	M16	18	3.16	GT12085599	GT12255599
80	88.9	200	20	160	118	34	R 3"	138	3	8	M16	18	3.60	GT12085920	GT12255920
100	114.3	220	20	180	140	40	R 4"	158	3	8	M16	18	4.39	GT12086640	GT12256640